

Managed Industrial Switch

FNS200-28-AGB-SFP-RS485-A

Din-Rail

Terminal Block

Introduction

FNS200-28-AGB-SFP-RS485-A is a network managed industrial Ethernet switch, complies with FCC, CE, RoHS standards. Support 2 Gigabit optical ports and 8 Gigabit electrical ports and 1 port RS232/RS422/RS485; support the Ethernet layer 2 protocol required by the industrial site to ensure the stability of the communication network; this series of switches adopts low power consumption and fanless design to ensure no noise interference; At the same time, it supports -40~70℃ working temperature and good EMC electromagnetic compatibility performance, ensuring stable work in harsh industrial environments, and building fast and stable network terminal interfaces for industrial applications such as factory automation, intelligent transportation, and video surveillance. Provide a safe and reliable solution for accessing the network.

Industrial-grade Design

- Metal casing, IP40 protection level
- Wide range operating temperature (-40ºC~70ºC)

Stability & Reliability

- Support QoS (IEEE 802.1p/1Q) and TOS/DiffServ to increase network stability

Standard & Convenience

- Support STP/RSTP/ERPS, SNMPv1/v2/v3 to ensure network security
- Support DIN-Rail and wall mounting
- Support POE (Optional)

Four-Faith

Tel: 400-8838-199

Web: www.fourfaith.com

V2.0.0 Copyright @ Four-Faith 2023

Managed Industrial Switch
FNS200-28-AGB-SFP-RS485-A



High Performance

- Support IGMP Snooping
- Support port based VLAN port, IEEE 802.1Q VLAN, easy network planning
- Using RMON to improve the prediction capability of network monitoring machine
- Support port mirroring function facilitates online debugging
- Support port rate limiting, broadcast storm suppression
- Support multicast storm suppression, unknown unicast storm suppression
- Support security management: ACL, 802.1X
- Management function: supports WEB, CLI, and SNMP management
- Support port mirroring, interface status monitoring, log management

Production Specification

Standard	
Model	FNS200-AGB-RS485-A
Item	**Content**
Ethernet Standard	IEEE802.3-10BaseT, IEEE802.3u-100BaseTX/100Base-FX, IEEE802.3x-Flow Control, IEEE802.3z-1000BaseLX, IEEE802.3ab-1000BaseTX, IEEE802.1ab logical Link discovery protocol, IEEE802.1D-Spanning Tree Protocol, IEEE802.1w-Rapid Spanning Tree Protocol, IEEE802.1Q -VLAN Tagging, IEEE802.1p -Class of Service, IEEE802.1X-Port Based Network Access Control and,etc.
Industry Standard	EMI：FCC Part 15 Subpart B Class A，EN 55022 Class A EMC: IEC(EN)61000-4-2(ESD): ±6kV Contact discharge, ±8kV Air discharge IEC(EN)61000-4-3(RS) : 10V/m(80 ~ 1000MHz) IEC(EN)61000-4-4(EFT): ethernet port: ±2kV CM//±1kV DM. IEC(EN)61000-4-5(Surge): ethernet port: ±2kV CM//±1kV DM. IEC(EN)61000-4-6(Radio frequency conduction) : 3V(10kHz ~ 150kHz),10V(150kHz ~ 80MHz) IEC(EN)61000-4-16(Common mode conduction): 30V cont. 300V,1s IEC (EN)61000-4-8 Shock：IEC 60068-2-27 Freefall：IEC 60068-2-32 Vibration：IEC 60068-2-6

V2.0.0 Copyright @ Four-Faith 2023

Managed Industrial Switch
FNS200-28-AGB-SFP-RS485-A



Switching Characteristics	
Model	FNS200-AGB-RS485-A
Item	Content
Buffer Memory	12Mbit
Transmission Method	Store-and-forward
Backplane Bandwidth	38G
Switching Latency	<10μs
MAC Address	8K
Power	
Item	Content
Input Voltage	Non POE：DC12-52V POE：DC48-57V (Dual power redundancy backup)
Access Terminal	Phoenix terminal block
Characteristics	Support dual power supply redundancy Support built-in over-current protection Support reverse connection protection with 4.0 A
Operating Environment	
Item	Content
Operating Temperature	-40 ºC ~70ºC
Storage Temperature	-40 ºC ~85ºC
Relative Humidity	5~95% (Non-condensing))
POE Standard（Optional）	
Item	Content
PoE Standard	IEEE802.3af/ IEEE802.3at
PoE Port	1-8 port support PoE
Output Power	Single port maximum power 15.4 W (IEEE 802.3 af) 30 W (IEEE 802.3 at)
Interfaces	
Item	Content
SFP Slot	Number：2 Type：1000BaseFX port (SFP slot), supporting 100 megabytes
Ethernet Port	Number：8 Type：RJ45, 10/100/1000M automatic detection, full/half duplex MDI/MDI-X adaptive
Optical Fiber	Support single-mode/multi-mode fiber Multi-mode fiber: 550M Single-mode optical fiber: 20/40/60/80/100KM
Serial port	supports 1 port RS232/RS422/RS485


V2.0.0 Copyright @ Four-Faith 2023

Managed Industrial Switch
FNS200-28-AGB-SFP-RS485-A



Other	
Model	FNS200-AGB-RS485-A
Item	Content
Shell	IP40 protection level, metal casing
Characteristic	Support the Console, Telnet, SSH, WEB management Support SNMP v1 / v2c/v3
Dimension	143.7*125*47.7mm
Weight	0.82Kg
Installation Method	DIN rail and wall mounted
Heat-dissipating Method	Natural cooling, no fan
Redundant Technology	Support STP/RSTP/MSTP Support ERPS
Multicast Technology	IGMP snooping，MLD snooping
Switching Function	Support the port speed limit Support port truck Support port flow control port VLAN, IEEE 802.1 Q VLAN Support broadcast storm suppression Support IPv6 management
LED	Power Indicator: PWR Port indicator: POE port, SFP port (Link/ACT)

Dimension (mm): 143.7*125*47.7mm

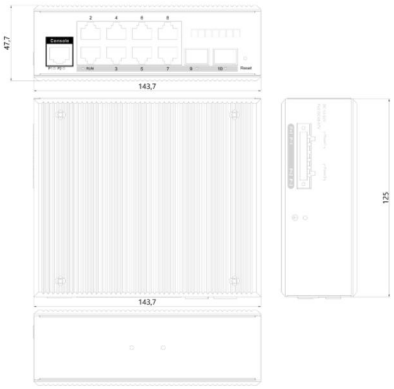

V2.0.0 Copyright @ Four-Faith 2023

Managed Industrial Switch
FNS200-28-AGB-SFP-RS485-A



Order Information

Model	Description
FNS200-28-AGB-8P-SFP-RS485-A	Managed Industrial Switch: 2 Gigabit optical port + 8Gigabit adaptive electrical ports+1 port RS232/RS422/RS485, SFP ports, POE function, DC48-57V power supply, wide temperature (-40 ° C -75 ° C), WEB/CLI management, SNMP-VLAN, and DC 52V/2.3A power adapter
FNS200-28-AGB-SFP-RS485-A	Managed Industrial Switch: 2 Gigabit optical port + 8Gigabit adaptive electrical ports+1 port RS232/RS422/RS485, SFP ports, DC12-52V power supply, wide temperature (-40 ° C -75 ° C), loop network (STP/RSTP/ERPS), WEB/CLI management, SNMP-VLAN, and DC 24V/1A power adapter

V2.0.0 Copyright @ Four-Faith 2023