Four-Faith®

## Compact Multi-Interface

# Industrial Router

**IWR202**




- 5G Redcap & 4G
- Passive PoE
- Full Aluminum Casing
- 2.4G WIFI
- RS232 & RS485
- DI & DO
- Dual SIM

EASY/NET TECHNOLOGIES

**EASE, EFFICIENCY, EXCELLENCE**

COMPREHENSIVE CONNECTIVITY SOLUTIONS FOR DIVERSE INDUSTRIES

**Product Details**
**easynt.com**

easynt.com LinkedIn

## Industrial Design with Aluminum Housing




Aluminum housing, IP30, stable in harsh environments

## Dual SIM Auto Switch




Dual SIM design, seamless signal, reliable backup switch

## Multiple IoT Interfaces




Integrated RS232/RS485 and DI/DO interfaces

## 5G Redcap & 4G Support

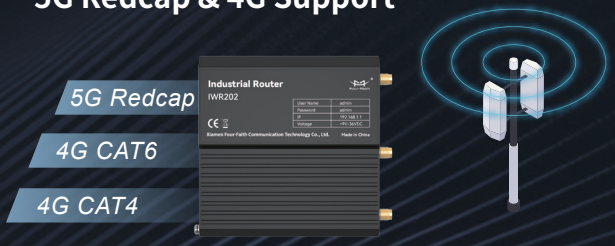


Supports 5G Redcap and 4G CAT4/CAT6 with multi-band compatibility.

| Item | IWR202 |
|---|---|
| CPU | MTK7628A Industrial-grade Processor |
| DDR | 128MB Industrial-grade RAM |
| Flash | 32MB Industrial-grade Flash |
| Cellular | 5G Redcap, 4G CAT6, 4G CAT4 |
| WIFI | IEEE802.11b/g/n, 2.4GHz |
| Ethernet | 1 x 100M WAN + 1 x 100M LAN |
| Serial | 1 x RS232, 1 x RS485 |
| I/O | 1 x DO, 1 x DI |
| SIM | 2 x 2FF SIM |
| VPN | Open VPN, GRE, IPSec, DMVPN, Zero Tier, PPTP, L2TP, Wire Guard |
| Casing | Aluminum Metal Casing, IP30 |
| Dimension | 91.4x92.4x31mm (Excludes Antennas and Mounting Accessories) |
| Installation | Wall-mount, DIN rail |
| Operating Temperature | -40°C-75°C |
| Storage Temperature | -40°C-85°C |