DONYX

donyx.com

User's guide

Router Donyx
RM55x4 5G RedCap



Table of contents

1. Specifications Sheet **03**
2. General Information **04**
2.1. Cellular Standards 04
2.2. Hardware Specifications 05
2.3. Physical Specifications 05
2.4. Environmental Operating Ranges 05
2.5. Electrical Specifications 06
2.6. Precautions 06
2.7. Functional Diagram of the Device 07
3. Device Exterior **08**
3.1. External Interfaces and Ports 08
3.2. Label 010
3.3. Power Input Connector 011
3.4. Ethernet Network Ports 012
3.5. Terminal Block Connector (RS485, GPI) 013
3.6. Console Interface Port 014
3.7. Antenna Information 015
3.8. Reset button 015
3.9. Indicator Logic and Behavior 016
4. Preparation and Connection **018**
4.1. Connection 018
4.2. SIM Card Installation 019
5. How to use **020**
5.1. Using General Purpose Inputs 020
5.2. Initial Configuration 021
6. Customer Support **022**

1. Specifications Sheet

This document applies to Router Donyx RM55x4 5G RedCap.

Document revision 17.12.2025.

2. General Information

This industrial-grade 5G router features quad-module 5G RedCap, each capable of delivering download speeds of up to 220 Mbps and upload speeds of up to 120 Mbps. This multi-module configuration provides enhanced connection resilience through automatic failover and load balancing, ensuring seamless operation and minimizing downtime.

Integrated redundancy features maintain connection stability. In the event of a primary network failure, the router automatically switches to a secondary cellular connection. Should all cellular connections become unavailable, the router seamlessly fails over to Ethernet or Wi-Fi, guaranteeing uninterrupted internet access in any environment.
Supporting up to four SIM cards, the router offers redundancy at both the module and carrier levels. Scheduled SIM management and failover capabilities mitigate the impact of physical SIM card failures and optimize network utilization.

Key features include five Gigabit Ethernet ports and dual-band Wi-Fi, offering fast and reliable connectivity for multiple devices. The router includes discrete GPI inputs for industrial system integration and a hardware-integrated GPS module for precise location tracking, ideal for asset tracking, fleet management, and remote monitoring.

Built for demanding conditions, the router operates within a wide temperature range, from -40°C to +65°C, and is housed in a rugged metal enclosure designed to withstand harsh industrial environments.
The router runs on an dnxOS operating system, supporting modern encryption, tunneling protocols like OpenVPN and IPsec to ensure secure data transmission. It provides advanced features such as custom VPN configurations, diagnostics tools, and flexible scripting capabilities, tailored for industrial and enterprise use.

This combination of powerful hardware and dedicated firmware delivers superior performance, security, and reliability, making the router an ideal solution for critical industrial and business applications.

2.1. Cellular Standards

Table 1. Router Donyx RM55x4 5G RedCap Cellular Standards

Cellular Module	Quantity	5G	LTE	GPS
NR5 (RedCap)	4	Yes	Yes	Yes

Specifications may change without prior notice!

2.2. Hardware Specifications

Number of Cellular Modules	4 x NR5 (RedCap)
Processor	Quad-core ARM Cortex A7 717MHz
Dynamic RAM	512 MB
NAND Flash Memory Capacity	256 MB
Wi-Fi	2.4 GHz (802.11b/g/n), 5 GHz (802.11ac)
Ethernet Connector	5x LAN 10/100/1000 Mbps
SIM Card Slots	Mini SIM
CONSOLE Connector	RJ45 Console Port
Microfit4 Connector	Power
Terminal Block	RS485, 3 x GPI
RST Button	Reset Button

2.3. Physical Specifications

- Maximum dimensions (including connectors): 180 × 180 × 50 mm
- Maximum weight: 770 g

2.4. Environmental Operating Ranges

- Enclosure Material: Aluminum
- Enclosure Protection Rating: IP30
- Operating Temperature Range: from -40°C to +65°C
- Storage Temperature Range: from -40 to 50°C
- Operating Humidity: from 10 to 80% noncondensing

2.5. Electrical Specifications

Power Supply Operating Characteristics:

- Power supply voltage from 10 to 30 V (DC)
- Current consumption, maximum:
  - At power supply voltage +12 V – 1500 mA;
  - At power supply voltage +24 V – 750 mA;

GPI 1-3 Mode Input:

- Voltage range for "0" (low level) — 0…0.3 V;
- Voltage range for "1" (high level) — 1.9 V…Vin;
- Maximum allowable input voltage — 30 V

2.6. Precautions

Restrictions on Router Usage Near Other Electronic Devices

- Power off the router in hospitals or in close proximity to medical devices (such as pacemakers, hearing aids, etc.). The router may cause interference with the operation of such equipment.
- Power off the router near gas stations, chemical plants, and blasting sites. The router may cause interference with the operation of equipment in these locations.
- Power off the router on aircraft and take measures to prevent accidental activation.
- At close range, the router may cause interference with the operation of televisions, radios, and other devices.

Environmental Protection


- Protect the router from dust and moisture.

Operational Considerations

- Adhere to permissible power supply and vibration standards at the device installation location.

2.7. Functional Diagram of the Device

The following diagram illustrates the main functional blocks of the router.

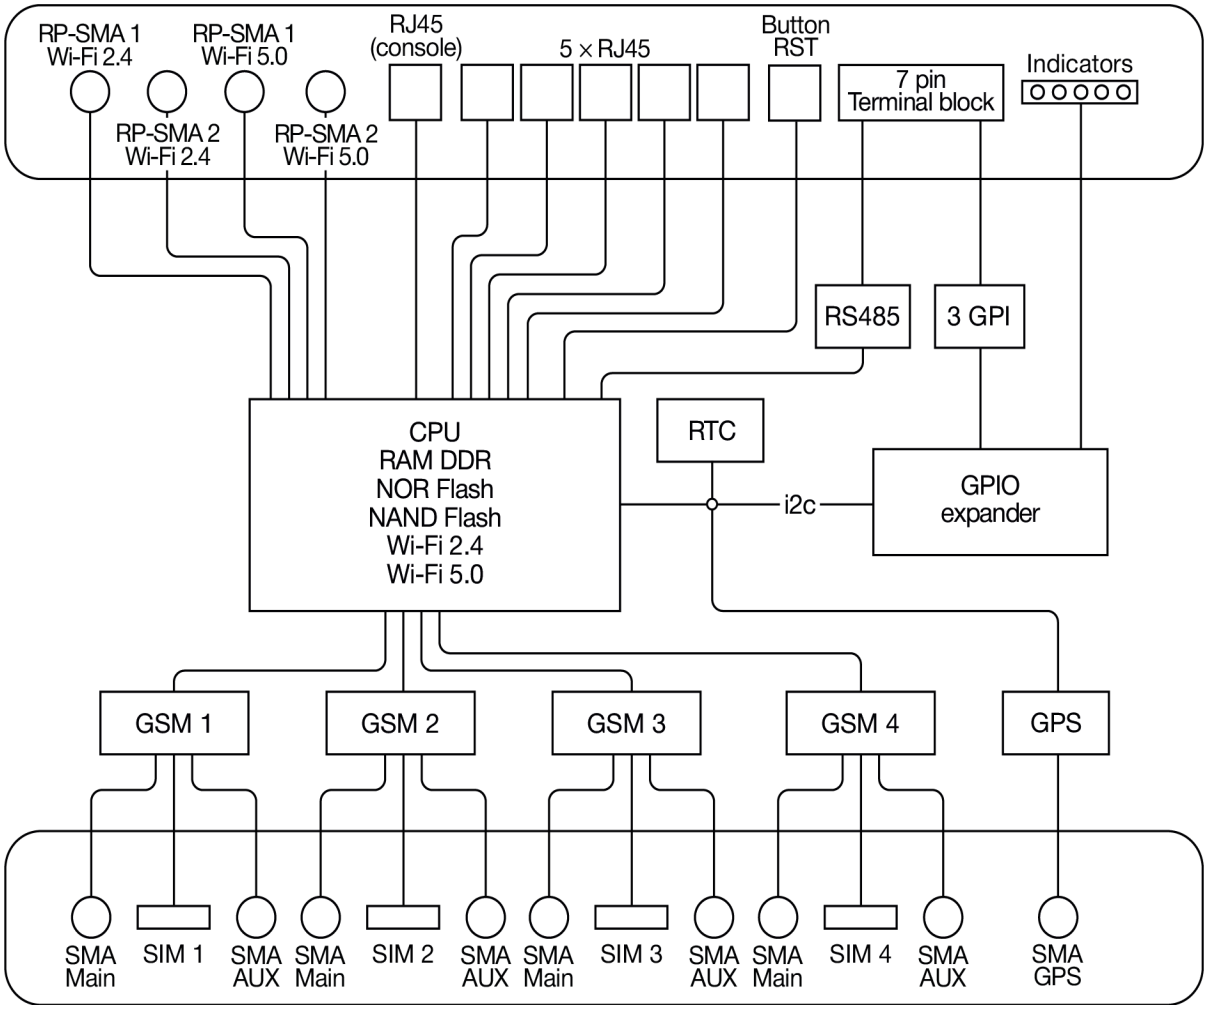

3. Device Exterior

3.1. External Interfaces and Ports

The following figures display the front and back views of the variants.

The rear views display powersupply, ports, antenna connectors and LEDs.

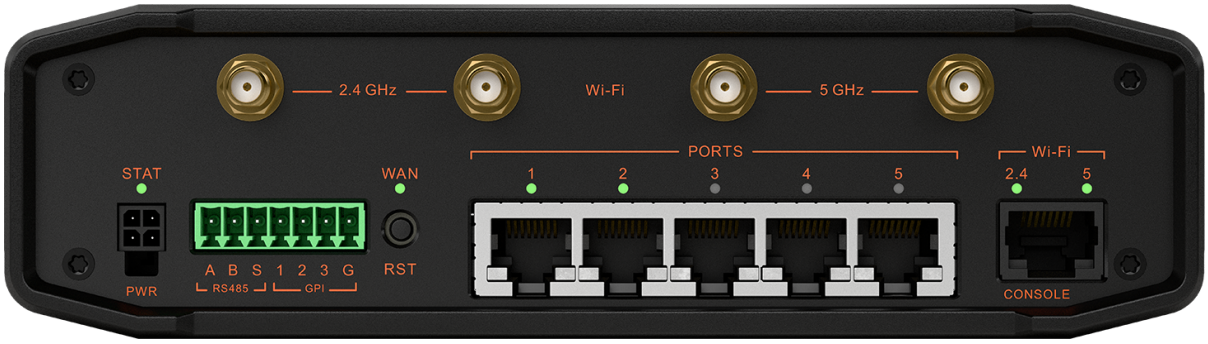


Figure 1. Front View

- **2.4 GHz** - RP-SMA Connectors for 2.4 GHz Wi-Fi Antenna
- **5 GHz** - RP-SMA Connectors for 5 GHz Wi-Fi Antenna
- **PWR** - Power Input Connector
- **RS485, GPI** - Terminal Block Connector (RS485, GPI)
- **RST** - Reset Button
- **PORTS 1-5** - Ethernet Network Ports
- **CONSOLE** - Console Interface Port

The backviews display antenna connectors, SIM slots , and LEDs.



Figure 2. Back View

- **GNSS** - GPS SMA Antenna Connector
- **A** - Mobile **AUX** Antenna Connector (Additional, Receive Only)
- **M** - Mobile **Main** Antenna Connector (Primary, Transmit and Receive)
- **SIM 1 - SIM 4** - SIM Card Trays

3.2. Label

The label is located on the bottom panel of the router. It contains basic device information and the details required for initial operation.

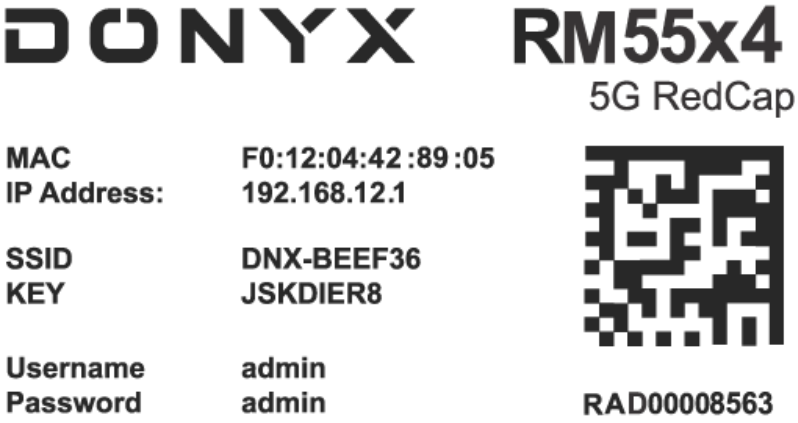


Table 2. Label Information

Basic Information	Model name, service Data Matrix code, device serial number
MAC	MAC address used for device identification
IP Address	IP address for accessing the device
SSID	Wireless network identifier
KEY	Wireless network security key
Username	Username
Password	Password

3.3. Power Input Connector

The Microfit4 power connector is used to connect the router to a power source. The power source requirements are: 10-30 VDC, with a minimum current of 1.5 A at 12 V.




Figure 3. Power Connector

Table 3. Power Connector Pinout

Pin	Signal	Description
1	OPTO-	Not used
2	OPTO+	Not used
3	GND	Ground (Negative)
4	U+	Power (Positive)

3.4. Ethernet Network Ports

The Ethernet ports are used to connect local network devices and support speeds of 10/100/1000 Mbps.




Figure 4. Ethernet Connector

Table 4. Ethernet Connector Pinout (10/100/1000 Mbps)

Pin	Signal (10BASE-T, 100BASE-T)	Signal (1000BASE-T)	Description
1	TX+	DA+	Transmit Data+ / Bi-directional
2	TX−	DA−	Transmit Data− / Bi-directional
3	RX+	DB+	Receive Data+ / Bi-directional
4	N/C	DC+	Not connected / Bi-directional
5	N/C	DC−	Not connected / Bi-directional
6	RX−	DB−	Receive Data− / Bi-directional
7	N/C	DD+	Not connected / Bi-directional
8	N/C	DD−	Not connected / Bi-directional

3.5. Terminal Block Connector (RS485, GPI)

The terminal block connector provides access to the RS485 serial interface and General Purpose Input/Output (GPIO) lines.




Figure 5. Interface Connector

Table 5. Interface Connector Pinout

Pin	Description
A	RS485 Signal A
B	RS485 Signal B
S	Shield (for signal cable shielding)
1	GPI1
2	GPI2
3	GPI3
G	GND (Ground/Negative; voltage level depends on the router’s power supply)

3.6. Console Interface Port

The console port is used to connect a computer to the router using a console cable.




Figure 6. Console Port

Table 6. Console Port Pinout

Pin	Signal	Description
1	RTS	Request To Send (Hardware Flow Control)
2	N/C	Not connected
3	TxD	Transmit Data
4	GND	Ground
5	GND	Ground
6	RxD	Receive Data
7	N/C	Not connected
8	CTS	Clear To Send (Hardware Flow Control)

3.7. Antenna Information

The router features the following antenna connectors:

Connector Type	Image	Purpose
4 x SMA Connectors		For cellular (Main) antennas
4 x SMA Connectors		For cellular (AUX) antennas
4 x RP-SMA Connectors		For Wi-Fi antennas
GNSS Connector (SMA)		For active GPS/GLONASS antenna

The **Main** antenna is the primary antenna and is used for both transmitting and receiving signals.

The **AUX** antenna is an auxiliary antenna and is used for receiving signals only.

The auxiliary antenna is recommended for use in environments with multipath propagation (e.g., dense urban areas) or in areas with high levels of signal noise. Using diversity reception with two antennas can improve signal quality and link stability in these challenging RF environments.

It is strongly recommended to use an antenna identical to the main antenna for the auxiliary port. Using dissimilar antennas for Main and AUX can degrade reception performance.

For installations deep within a building, in a basement or sub-basement, it is best to use an external antenna connected to the Main port. To minimize signal loss, the antenna cable length should not exceed 10 meters.

3.8. Reset button

The reset button can be used to reboot the router or restore it to factory default settings if access to the web interface or command-line interface is lost.

To reboot the device, press and hold the reset button for 3-8 seconds.

To restore factory default settings, press and hold the reset button for longer than 8 seconds.

Interrupting power to the router during a firmware upgrade or factory reset could render the device inoperable. Ensure that power is maintained throughout these processes.

3.9. Indicator Logic and Behavior

The router's indicators are located on the front panel.

Cellular Module Indicators

Cellular Network Indicator	
● Solid Green	5G connection established
❋ Blinking Green	4G (LTE) connection established
● Solid Red	3G connection established (if supported)
❋ Blinking Red	Connecting to the network
○ Off	No connection established
Signal Strength Indicator	
● Solid Green	High signal strength (70-100%)
❋ Blinking Green	Medium signal strength (35-70%)
● Solid Red	Low signal strength (0-35%)
○ Off	No connection established
WAN External Network Indicator	
● Solid Green	Connection configured and established
○ Off	Connection not configured
Port 1-5 LAN Port Status Indicator	
● Solid Green	Cable connected
❋ Blinking Green	Data transmission in progress
○ Off	No cable connected

STAT Power/Status Indicator

✳ Blinking Green	Firmware update in progress
● Solid Green	Normal operation
✳ Slow Blinking Green	Booting
○ Off	No power

Wi-Fi Indicators

2.4 Wi-Fi 2.4 GHz Wi-Fi Indicator

○ Off	Wi-Fi disabled
✳ Blinking Green	Wi-Fi data transmission in progress
● Solid Green	Wi-Fi enabled

5 Wi-Fi 5 GHz Wi-Fi Indicator

○ Off	Wi-Fi disabled
✳ Blinking Green	Wi-Fi data transmission in progress
● Solid Green	Wi-Fi enabled

4. Preparation and Connection

4.1. Connection

1. Connect the required antennas to their respective connectors. For proper operation, the M (Main) antennas must be connected.
2. Insert SIM cards into the designated SIM card trays.
3. Connect an Ethernet cable to the Ethernet ports (Port 1 … Port N, depending on the router model).
4. Connect the power adapter to the PWR connector.

   Allow the router sufficient time to boot. After 1-2 minutes, the PWR indicator will stop flashing, indicating that the router's operating system has successfully loaded. You can then connect to the router via its web interface.
5. Ensure that the IP address 192.168.1.1 is not in use on the local network and that the host computer is either configured to obtain an IP address automatically via DHCP, or has a static IP address assigned within the 192.168.1.0/24 subnet.
6. Open a web browser and enter http://192.168.1.1 in the address bar.
7. Log in using the default credentials: username root and password root.

4.2. SIM Card Installation

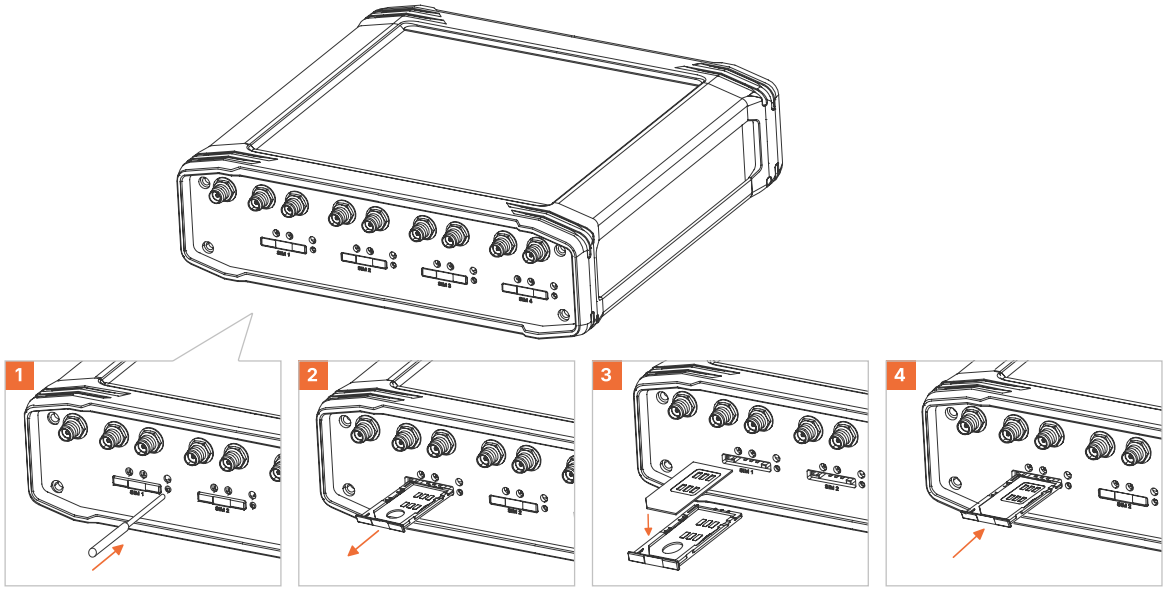


Figure 7. SIM Card Placement

1. Using a thin object, press the SIM tray eject button. The button is located to the right of the tray.
2. Remove the SIM tray.
3. Place the SIM card in the tray as shown in the diagram.
4. Insert the SIM tray into the router, ensuring it is properly aligned with the SIM holder guides.

SIM trays are inserted with the SIM card facing UP.

5. If the SIM tray is difficult to insert, it is likely misaligned with the guides. Carefully remove the tray and try again.

5. How to use

5.1. Using General Purpose Inputs

Router RM55x4 5G RedCap provides General Purpose Inputs (GPIs) accessible through a 7-pin pluggable terminal block located on the front panel.

Apply voltage to the GPI pins only after the router has fully powered on. Wait for the router to complete its boot sequence (approximately two minutes).

The voltage applied to any GPI must not exceed the router's supply voltage.

Without a 10 kΩ pull-up resistor: The voltage applied to the GPI must be equal to the router's supply voltage. Any voltage difference is not permitted.

With a 10 kΩ pull-up resistor: A voltage difference between the router's supply voltage and the applied GPI voltage is permissible.

When connecting devices to the router's GPIs, a series resistor is required in the circuit. The resistor value should be determined based on the specific application requirements.

The following diagram illustrates an example connection:

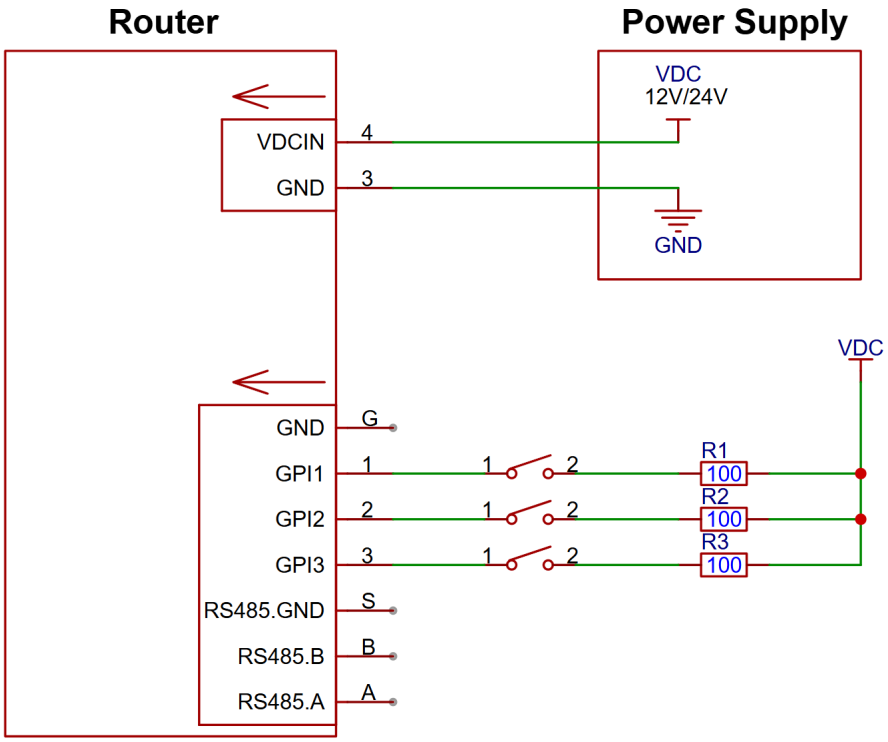


Figure 8. Example GPI Connection Diagram

The use of series resistors in the GPI circuit is mandatory. Select appropriate resistor values for your specific application.

5.2. Initial Configuration

For instructions on initial setup and accessing the operating system, please refer to the ***OS Quick Start Guide***.

6. Customer Support

Website	donyx.com
Support center 24/7	+86 0769-21665185
E-mail	support@donyx.com